



**CUSHMAN®**

# HAULER<sup>®</sup> 800



## EFFICIENT AND RELIABLE— THE “GO-TO” VEHICLE.

The Cushman® Hauler® 800 is built to move people and small equipment around any work site with ease. With standard seating for two, a 5.9-cubic-foot cargo bed and a total capacity of 800 pounds, this vehicle can carry small crews around any site quickly. The Hauler 800 is the ideal runabout vehicle to handle everyday tasks and transportation needs.

**800<sup>LB</sup>**  
TOTAL LOAD  
CAPACITY

**LIMITED  
SLIP**  
DIFFERENTIAL  
OPTION


**5.9<sup>CU FT</sup>**  
CARGO BED  
CAPACITY



# CUSHMAN® HAULER<sup>□</sup> 800



HEADLIGHTS

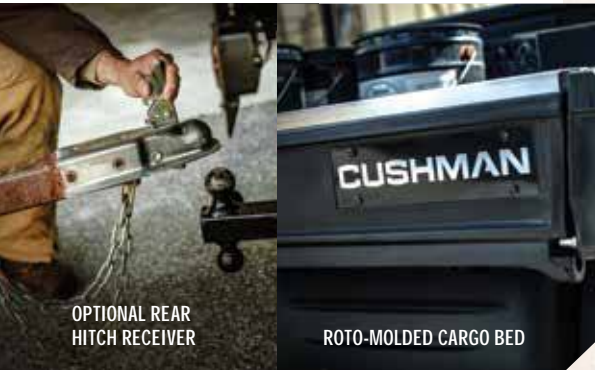

OPTIONAL REAR  
HITCH RECEIVER

ROTO-MOLDED CARGO BED

## OPTIONS & ACCESSORIES

- Front and Rear Bumpers
- Heater/Defroster
- Rear Shock Absorbers
- Rearview Mirrors
- Roll Over Protection System with Seat Belts and Side Nets
- Spark Arrestor
- Box Sides and Tailgate
- Back-Up Alarm
- Speedometer
- Power Dump
- Strobe Light
- Body Color (Patriot Blue, Ivory, White, Yellow, Orange or Custom Options)
- Turn Signal with Four-Way Flashers
- Steel Cab



COVERED WITH THE 2-YEAR CUSHMAN CARE TOTAL PROTECTION WARRANTY

### ELECTRIC MODEL

### GAS MODEL

BODY & CHASSIS	
FRAME	Welded Steel w/ DuraShield <sup>□</sup> Powder Coat
BODY & FINISH	Injection Molded TPO (Front) / Steel Polyester Powder Coat (Rear)
STANDARD COLOR	Forest Green
DIMENSIONS	
OVERALL LENGTH	107.0 in (272 cm)
OVERALL WIDTH	49.5 in (126 cm)
OVERALL HEIGHT	46.5 in (118 cm) (w/o Roof) / 70.0 in (178 cm) (w/ Struts & Roof)
WHEEL BASE	65.5 in (166 cm)
WHEEL TRACK	37.0 in (94 cm) Front / 38.0 in (97 cm) Rear
GROUND CLEARANCE	4.3 in (11 cm)
CARGO DECK CAPACITY	5.9 cu ft (0.17 m <sup>3</sup> )
CARGO DECK MATERIAL	Roto-Molded Polyethylene
POWER	
POWER SOURCE	48V DC Shunt Wood
VALVE TRAIN	N/A
HORSEPOWER (KW)	3.0 hp (2.2 kW) Continuous
ELECTRICAL SYSTEM	48V
BATTERY (QTY/TYPE)	Six, 8V Deep Cycle
BATTERY CHARGER	48V DC PowerWise <sup>□</sup> QE, 120V AC, UL/CSA
KEY OR PEDAL START	Pedal
AIR CLEANER	N/A
LUBRICATION	N/A
OIL FILTER	N/A
COOLING SYSTEM	N/A
FUEL CAPACITY	N/A
SPEED CONTROLLER	250 Amp Solid State Controller
DRIVE TRAIN	Motor Shaft Direct Drive
TRANSAXLE	Differential w/ Helical Gears
GEAR SELECTION	Dash-Mounted Forward-Neutral-Reverse
REAR AXLE RATIO	12.44:1
PERFORMANCE	
SEATING CAPACITY	2-Person (Bench)
WEIGHT W/O BATTERIES	747 lb (339 kg)
CURB WEIGHT	1112 lb (504 kg)
VEHICLE LOAD CAPACITY	800 lb (362 kg)
BED LOAD CAPACITY	500 lb (226 kg)
TOWING CAPACITY	475 lb (215 kg) Max Load
OUTSIDE CLEARANCE CIRCLE	18.9 ft (5.76 m)
SPEED	14 mph ± 0.5 mph (23 kph ± 0.8kph)
STEERING & SUSPENSION	
STEERING	Self-Compensating Rack & Pinion
SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
SERVICE BRAKE	Rear Wheel Mechanical, Self-Adjusting Drum
PARKING BRAKE	Self-Compensating, Single-Point Engagement
TIRES (FRONT & REAR)	Links 18 x 8.50 - 8 (4 Ply Rated) (Front) / Turf Savers 18 x 8.50 - 8 (Load Range B) (Rear)